


# Reference Drawing

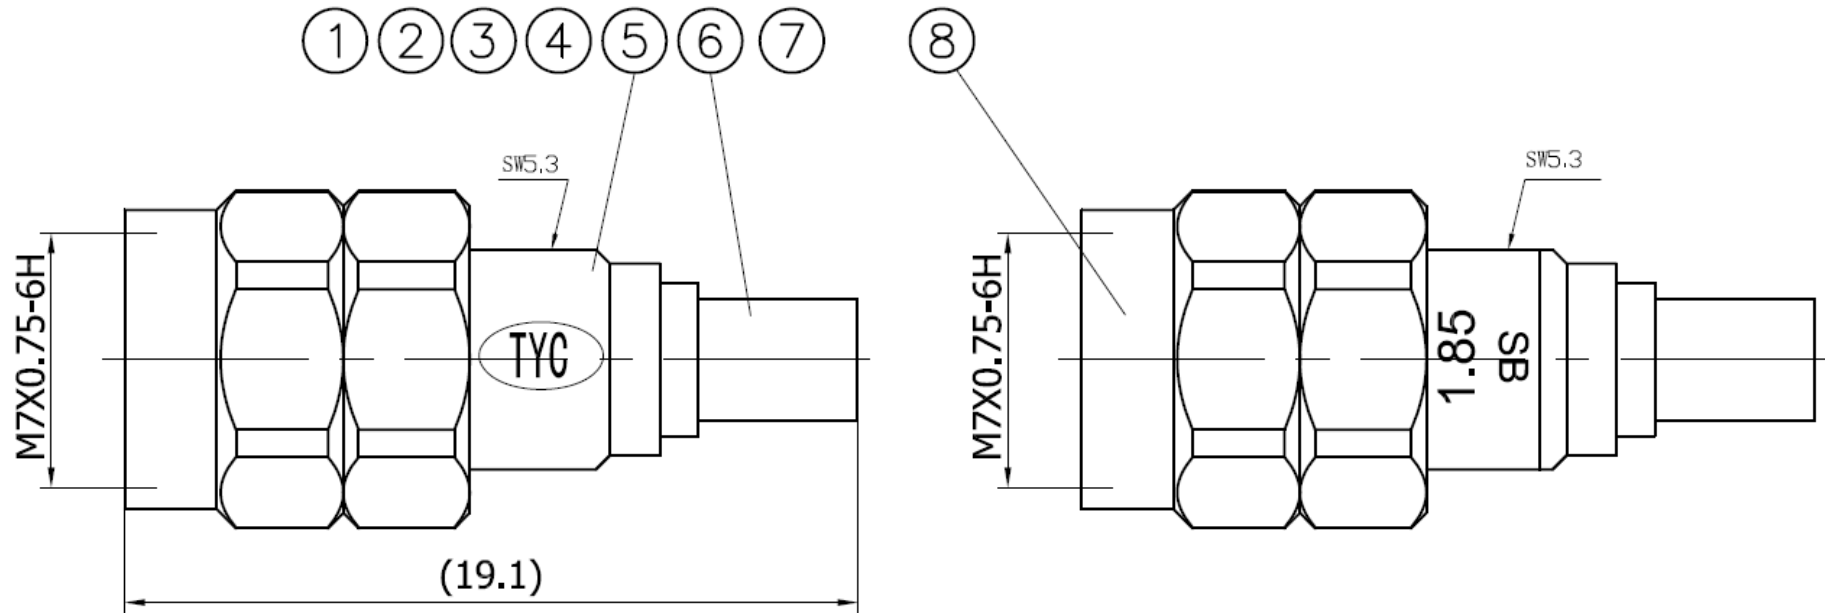

PERFORMANCE:  
 IMPEDANCE: 50 OHMS  
 FREQUENCY: 65GHz  
 VSWR: ≤1.30

- \*1: PASSIVATE
- \*2: STAINLESS STEEL
- \*3: BERYLLIUM COPPER

NO.	DESCRIPTION	MATERIAL	Q'TY	FINISH
8	COUPLING NUT	*2	1	*1
7	HOLDING RING	*3	1	NI
6	BODY	*2	1	*1
5	BODY	*2	1	*1
4	BUSHING	*2	1	*1
3	BUSHING	*2	1	*1
2	INSULATOR	PEI	2	
1	CENTER PIN	*3	1	AU

R o H S Compliant <span style="border: 1px solid black; padding: 2px;">Cd ≤75ppm</span>	
REMARKS	BRASS: Cd ≤75ppm PHOSPHOR BRONZE: Pb <4wt%

SCALE NONE		PART NUMBER
UNIT mm		1.85P-A-SMPMP(SB)
DATE 2025/08/26	PROJECTION 	TO-CONNE CO.,LTD