


指定外寸公差(单位: mm)	
寸法区分	公差
4.0未満	±0.3
4.0~16.0	±0.5
16.0~63.0	±0.7
63.0~250.0	±1.2
250.0~1000.0	±2.0

※1

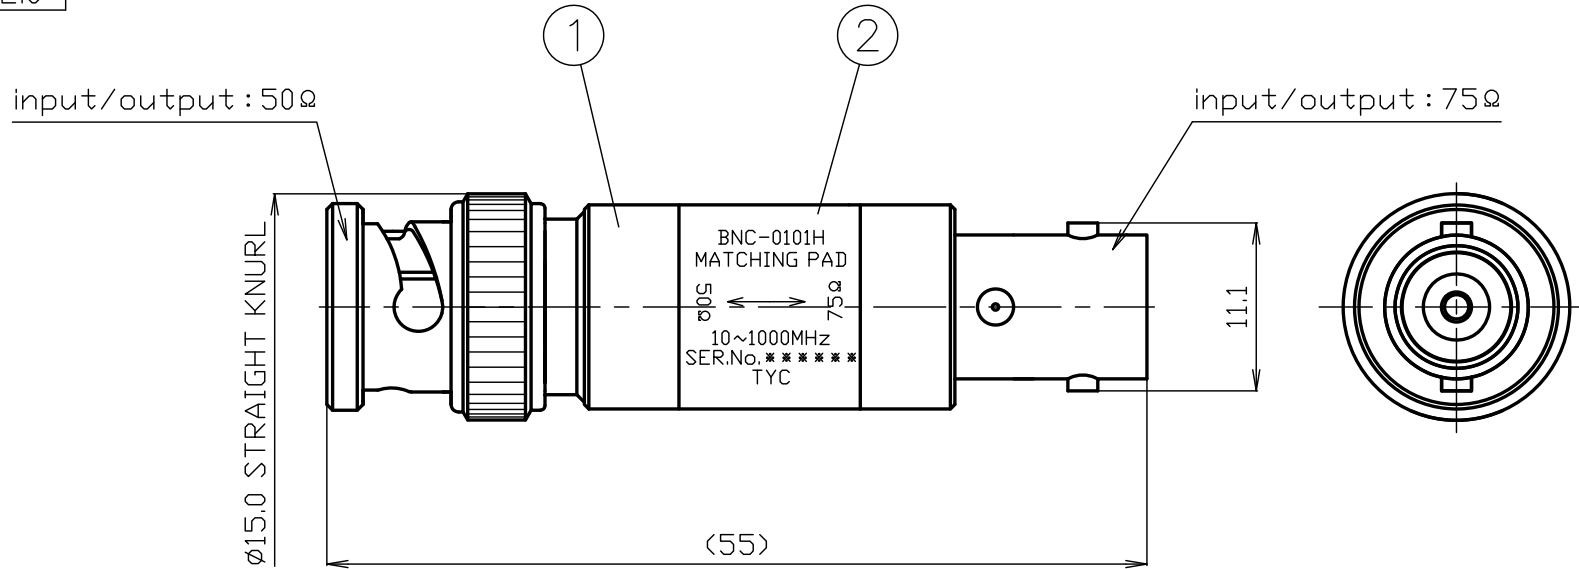

RoHS Compliant [Cd ≤75ppm]	
REMARKS	BRASS: Cd ≤75ppm PHOSPHOR BRONZE: Pb <4wt%

NO.	DESCRIPTION	MATERIAL	Q'TY	FINISH	REMARK	SCALE	DRAWN	INSPECTED	APPROVED	CHECKED	PART NUMBER
7						2/1	井	檜	山	三	BNC-0101H
6						TOLERANCE	'24.04.08	'24.04.08	'24.04.08	'24.04.08	
5						※1	出	澤	本	村	
4						UNIT					
3						mm					
2	LABEL	-----	1	--		DATE	PROJECTION				
1	BNC TYPE IMPEDANCE CONVERTER	-----	1	--	BODY/Ni. CENTER PIN/Aq	2024.04.08					DRAWING NO. U-0396550

PRODUCT SPECIFICATIONS

Part number: BNC-0101H

No. 0392664

Drawing number: U-0396550

Nominal 1 Standard	JIS C 5412(BNC50Ω)、JEITA RC-5233(BNC75Ω)
2 Power handling	0.5W
3 Rated frequency	1GHz
4 Impedance	50Ω←→75Ω
5 Operating temperature range	-20°C~+50°C



		Test Items	Test Method/Value	Remarks
1	E L E C T R I C A L	V.S.W.R.	10MHz~50MHz : 1.3(Max.) 50MHz~1000MHz : 1.2(Max.)	
2		Insertion loss	10MHz~50MHz : 0.8dB(Max.) 50MHz~500MHz : 0.5dB(Max.) 500MHz~1000MHz : 1.0dB(Max.)	
3	M E C H A N I C A L	Compatibility	No defects or abnormalities	Connecting with a standard-compliant connector
	O T H E R S			

※The structural shape is shown in the attached drawing (Drawing number:U-0396550)

	REVISIONS	DATE
1		
2		
3		

Checked	Approved	Inspected	Prepared
三	山	檜	井
24.04.08	24.04.08	24.04.08	24.04.08
村	本	澤	出

GKQM-24