


DIMENSIONAL TOLERANCE TABLE	
DIVISION	TOLERANCE
Less than 4.0	±0.3
4.0~16.0	±0.5
16.0~63.0	±0.7
63.0~250.0	±1.2
250.0~1000.0	±2.0


UNIT : mm

※1



input/output : 50Ω

φ15.0 STRAIGHT KNURL

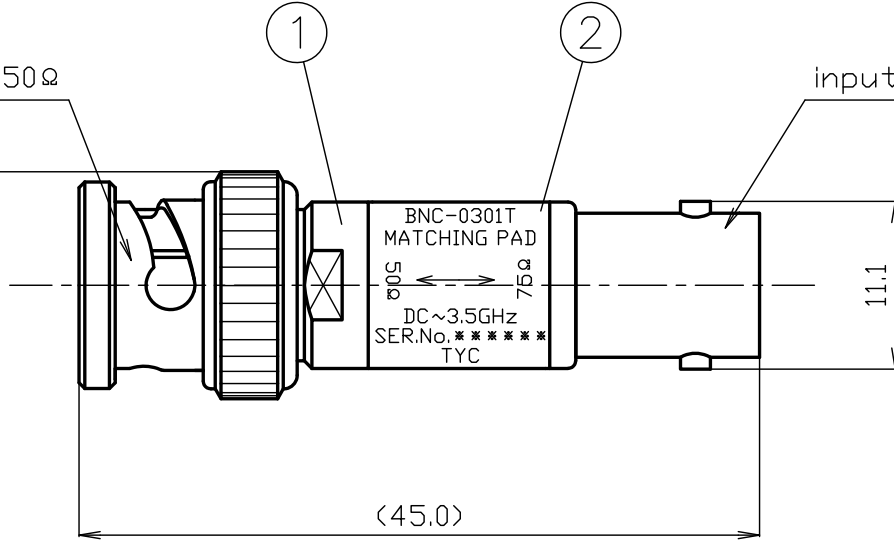

RoHS Compliant [Cd ≤75ppm]

REMARKS BRASS: Cd ≤75ppm  
PHOSPHOR BRONZE: Pb <4wt%

7						SCALE	2/1	DRAWN	INSPECTED	APPROVED	CHECKED	PART NUMBER
6						TOLERANCE	※1	上	檜	山	三	BNC-0301T
5						UNIT	mm	'24.05.17	'24.05.17	'24.05.17	'24.05.17	
4								領	澤	本	村	
3												
2	LABEL	-----	1	--								
1	BNC TYPE IMPEDANCE CONVERTER	-----	1	--	BODY/Ni, CENTER PIN/Au	DATE	2024.04.24	PROJECTION				DRAWING NO. W-0396409
NO.	DESCRIPTION	MATERIAL	Q'TY	FINISH	REMARK							

# PRODUCT SPECIFICATIONS

Part number: BNC-0301T

No. 0592586

Drawing number: W-0396409

Nominal	1 Standard	JIS C 5412(BNC50Ω)、JEITA RC-5233(BNC75Ω)
	2 Power handling	0.5W
	3 Rated frequency	3.5GHz
	4 Impedance	50Ω←→75Ω
	5 Operating temperture range	-10°C~+40°C
	6 Operating humidity range	90%(Max.) ※No condensation



		Test Items	Test Method/Value	Remarks
1	E L E C T R I C A L	V.S.W.R.	DC~2GHz : 1.2(Max.) 2GHz~3.5GHz : 1.25(Max.)	
2		Insertion loss	DC~2GHz : 5.7±0.5dB 2GHz~3.5GHz : 5.7±0.7dB	
3				
4				
5	M E C H A N I C A L	Compatibility	No defects or abnormalities	Connecting with a standard-compliant connector
6				
7				
8				
9				
10				
11	O T H E R S			

※The structural shape is shown in the attached drawing (Drawing number:W-0396409)

	REVISIONS	DATE
1		
2		
3		

Checked	Approved	Inspected	Prepared

GKQM-24