


指定外寸公差(单位: mm)	
寸法区分	公差
4.0未満	±0.3
4.0~16.0	±0.5
16.0~63.0	±0.7
63.0~250.0	±1.2
250.0~1000.0	±2.0

※1

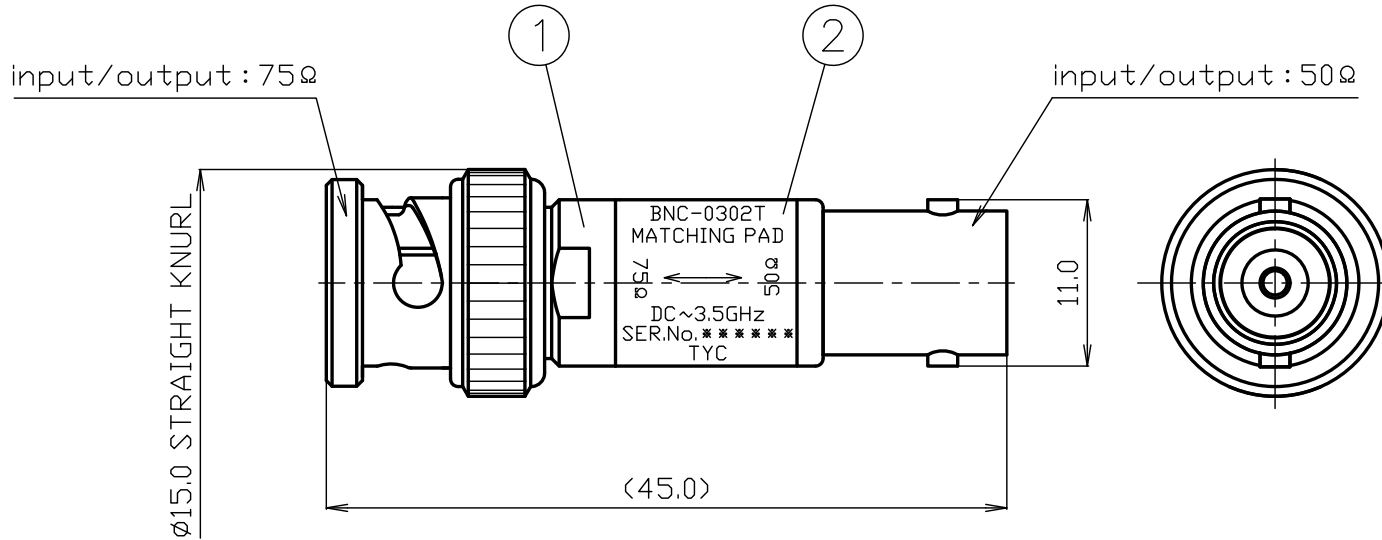

RoHS Compliant [Cd ≤75ppm]  
 REMARKS BRASS: Cd ≤75ppm  
 PHOSPHOR BRONZE: Pb <4wt%

7						SCALE	2/1	DRAWN	INSPECTED	APPROVED	CHECKED	PART NUMBER
6						TOLERANCE	※1	井	檜	山	三	BNC-0302T
5						UNIT	mm	'24.04.09	'24.04.09	'24.04.09	'24.04.09	
4								出	澤	本	村	
3												
2	LABEL	-----	1	--								
1	BNC TYPE IMPEDANCE CONVERTER	-----	1	--	BODY/Ni. CENTER PIN/Au	DATE	2024.04.09	PROJECTION	株式会社 トーコネ TO-CONNE CO., LTD.			DRAWING NO. U-0396553
NO.	DESCRIPTION	MATERIAL	Q'TY	FINISH	REMARK							

# PRODUCT SPECIFICATIONS

Part number: BNC-0302T

No. 0392666

Drawing number: U-0396553

Nominal 1 Standard JIS C 5412(BNC50Ω)、JEITA RC-5233(BNC75Ω)

2 Power handling 0.5W

3 Rated frequency 3.5GHz

4 Impedance 75Ω←→50Ω

5 Operating temperature range -10°C~+40°C

6 Operating humidity range 90%(Max.) ※No condensation



		Test Items	Test Method/Value	Remarks	
1	E L E C T R I C A L	V.S.W.R.	DC~2GHz : 1.2(Max.) 2GHz~3.5GHz : 1.25(Max.)		
2		Insertion loss	DC~2GHz : 5.7±0.5dB 2GHz~3.5GHz : 5.7±0.7dB		
3	M E C H A N I C A L	Compatibility	No defects or abnormalities	Connecting with a standard-compliant connector	
	O T H E R S				

※The structural shape is shown in the attached drawing (Drawing number:U-0396553)

	REVISIONS	DATE
1		
2		
3		

Checked	Approved	Inspected	Prepared
三	山	檜	井
24.04.09	24.04.09	24.04.09	24.04.09
村	本	澤	出

GKQM-24