


指定外寸公差(单位: mm)	
寸法区分	公差
4.0未満	±0.3
4.0~16.0	±0.5
16.0~63.0	±0.7
63.0~250.0	±1.2
250.0~1000.0	±2.0

※1

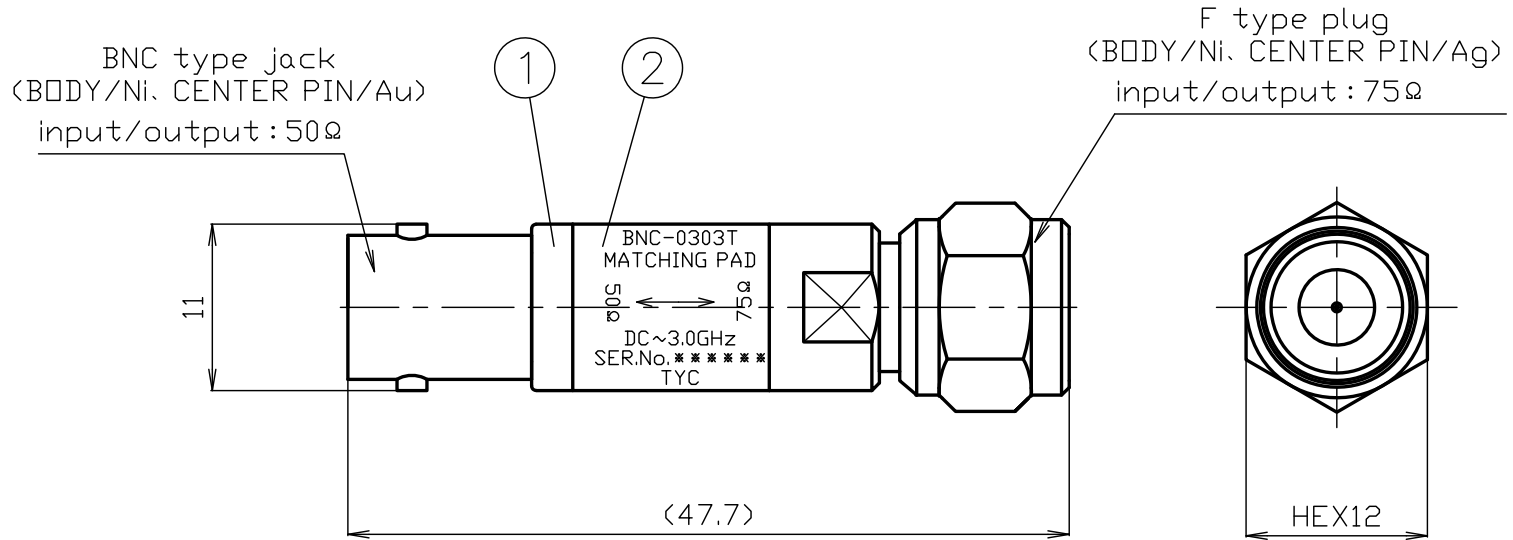

RoHS Compliant [Cd ≤75ppm]	
REMARKS	BRASS: Cd ≤75ppm PHOSPHOR BRONZE: Pb <4wt%

NO.	DESCRIPTION	MATERIAL	Q'TY	FINISH	REMARK	SCALE	DRAWN	INSPECTED	APPROVED	CHECKED	PART NUMBER
7						2/1	井	檜	山	三	BNC-0303T
6						TOLERANCE	'24.04.09	'24.04.09	'24.04.09	'24.04.09	
5						※1	出	澤	本	村	
4						UNIT					
3						mm					
2	LABEL	-----	1	--		DATE	PROJECTION				
1	BNC-F TYPE IMPEDANCE CONVERTER	-----	1	--		2024.04.09					DRAWING NO. U-0696554

# PRODUCT SPECIFICATIONS

Part number: BNC-0303T

No. 0692667

Drawing number: U-0696554

Nominal 1 Standard	JIS C 5412(BNC type)、JEITA RC-5223(F type)
2 Power handling	0.5W
3 Rated frequency	3.0GHz
4 Impedance	50Ω←→75Ω



		Test Items	Test Method/Value	Remarks
1	E L E C T R I C A L	V.S.W.R.	DC~1.5GHz : 1.2(Max.) 1.5GHz~3.0GHz : 1.25(Max.)	
		Insertion loss	DC~1.5GHz : 5.7±0.5dB 1.5GHz~3.0GHz : 5.7±0.7dB	
3	M E C H A N I C A L	Compatibility	No defects or abnormalities	Connecting with a standard-compliant connector
	O T H E R S			

※The structural shape is shown in the attached drawing (Drawing number:U-0696554)

	REVISIONS	DATE
1		
2		
3		

Checked	Approved	Inspected	Prepared
三	山	檜	井
24.04.09	24.04.09	24.04.09	24.04.09
村	本	澤	出

GKQM-24