
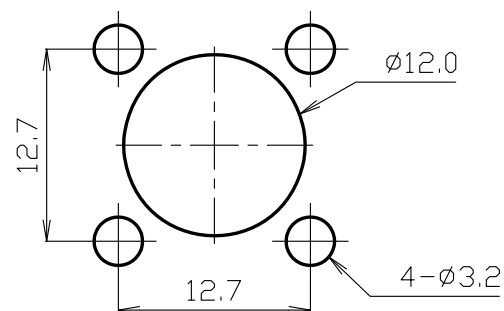
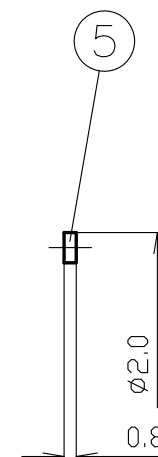
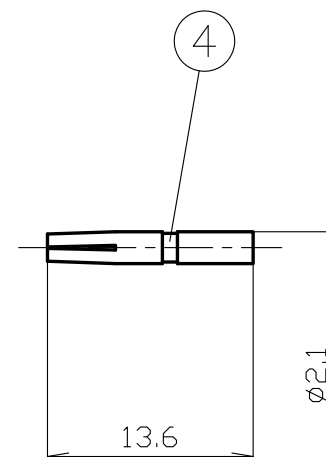
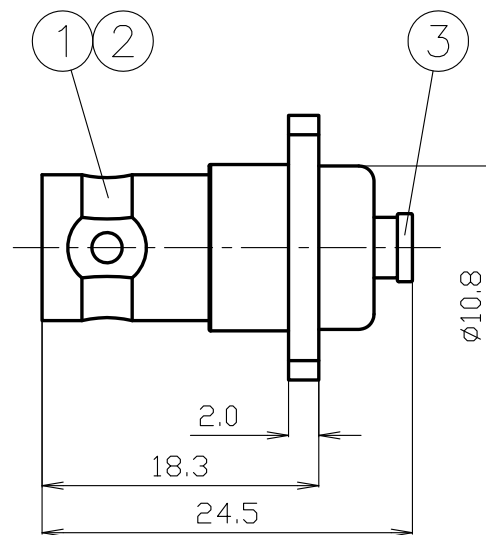


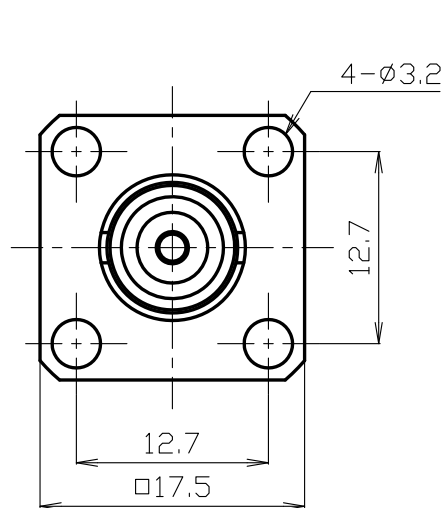

取付穴参考寸法

RoHS Compliant

7						尺度 2/1	製図	検図	承認	確認	品名
6							栗	檜	山	三	BNC-PJ-085
5	スペーサ	テフロン	1	--			'14.06.05	'14.06.05	'14.06.05	'14.06.05	
4	中心コンタクト	リン青銅	1	Au			原	澤	本	村	
3	ホルダー	黄銅	1	Au		単位 mm					
2	絶縁体	テフロン	1	--		日付	投影法				
1	本体	黄銅	1	Ni		2014.06.05					
番号	部品名	材質	数量	処理	備考						図番 Y-0324381

CONNECTOR TERM TRANSLATION

■Parts List

部品名	DESCRIPTION
接続スリーブ	SHELL
絶縁体	INSULATOR
ガスケット	GASKET
ウェーブワッシャー	WAVE WASHER
ワッシャー	WASHER
本体、シェル	BODY
中心コンタクト	CENTER PIN
圧着スリーブ	FERRULE
締付ナット	NUT
保持リング	HOLDING RING
ブッシング	BUSHING
平ワッシャー	FLAT WASHER
半円平ワッシャー	HALF FLAT WASHER
スペーサー	SPACER
接続ナット	COUPLING NUT
外部コンタクト	OUTER CONTACT
Oリング	O-RING
六角ナット	HEX NUT
クランプ	CLAMP
ホルダー	BARREL
フタ	COVER
割りクランプ	SPLIT CLAMP
留めネジ	SCREW
バネリング	SPRING
ヒートシンク	HEAT SINK
抵抗器、抵抗素子	RESISTOR
スプリングワッシャー	SPRING WASHER
六角穴留めネジ	SOCKET HEAD CAP SCREW
ブラケット	BRACKET
ブッシュ	BUSH
同軸型避雷管	COAXIAL LIGHTNING ARRESTER
丸型端子	ROUND TERMINAL
減衰素子	ATTENUATION TERMINAL

■Parts List

部品名	DESCRIPTION
表示シール	STICKER
熱収縮チューブ	HEAT SHRINK TUBE
丸ナット	RING NUT

■Material List

材質	MATERIAL
亜鉛ダイカスト	ZnDC
ジラコン	POM
シリコンゴム	SILICONE
テフロン	PTFE
鉄、炭素工具鋼	CARBON STEEL
黄銅	BRASS
ベリリウム銅	BERYLLIUM COPPER
リン青銅	PHOSPHOR BRONZE
無酸素銅	OXYGEN-FREE COPPER
アルミニウム	ALUMINUM
ステンレス	STAINLESS STEEL

■List of Notations on Drawings

取付穴参考寸法	MOUNTING HOLE
最大パネル厚さ、使用可能パネル厚	PANEL THICKNESS
識別No.	SERIAL No.
刻印	STAMP
Dカット幅	D FLAT
Hカット幅	H FLAT
アヤメローレット	DIAMOND KNURL
タテメローレット	STRAIGHT KNURL
識別溝、目印、溝	GROOVE

■Surface List

処理	FINISH
三元めっき	TERNARY PLATING
黒色アルマイト	ANODAIZING(BLACK)
パッシベイト	PASSIVATE

PRODUCT SPECIFICATIONS

Part No. BNC-PJ-085

DWG No. Y-0324381

Nominal 1 Standard
2 Frequency range
3 Impedance

MIL-C-39012
4 GHz
50 Ω

No. 0321611

To-Conne Co., Ltd. (TYC)

Checked	Inspected	Prepared
山 14.06.05 本	檜 14.06.05 澤	栗 14.06.05 原

	Test Items	Procedures/Test method	Requirements
1	DESIGN	Design & construction	Specified on relevant product drawing (DWG No. Y-0324381) No defects or abnormalities
2		Materials	
3		Finishes	
4	ELECTRICAL	Insulation Resistance	DC 500V 5000M Ω (Min.)
5		Withstanding voltage	DC 1500V (1 minute.) No defects or abnormalities
6		Contact resistance	DC 0.2V、 1A Inner 1.5m Ω (Max.) Outer 1m Ω (Max.)
7	MECHANICAL	Compatibility	Connecting with a standard-compliant connector No defects or abnormalities
8		Force to engage/disengage	Force to engage 11.1N(Max.) Force to disengage 13.3N(Max.) No defects or abnormalities
9		Cable tensile strength	At axial tensile force 88.9N (Min.) No defects or abnormalities
10		Center contact retaining force	When using the standard pin gauge 0.56N (Min.) No defects or abnormalities

GKQM-19-1

	Remarks	Date
1		
2		
3		

BNC-PJ-085 Cable Assembly Instructions


Cable group 0.085 Semi-Rigid, 0.085 Semi-Flex

DRAWING NO. Y-0324381

All parts of the connector as shown



DRAWN	INSPECTED	APPROVED	CHECKED
渡邊 '23,12,13 直弘	檜 '23,12,13 澤	山 '23,12,13 本	三 '23,12,13 村




BODY




CENTER PIN



SPACER

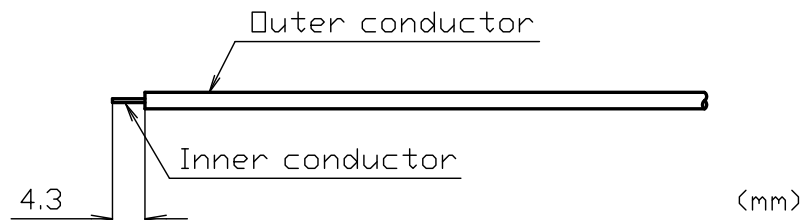

- 1 Cut outer conductor and insulator to dimensions as shown.

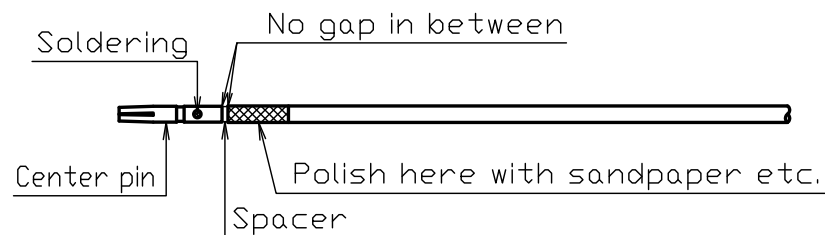

- 2 Solder center pin and spacer on inner conductor of the cable.

ATTENTION

There should be no gaps between the center pin, spacer, and outer conductor. After soldering, slightly pull center pin and make sure it is securely attached. For semi-rigid cable, polish area shown in diagram with sandpaper will make it easier to solder between cable and body.



- 3 Attach the cable with the center pin to the Body and complete the work by soldering.

ATTENTION

Solder should be applied evenly. To secure the cable and solder it quickly so that thermal stress does not push the internal insulation out or push the cable back in.