
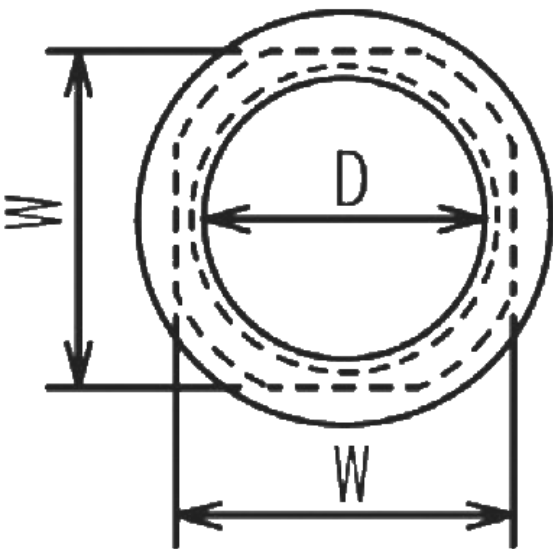


Reference Drawing

Cable Gland

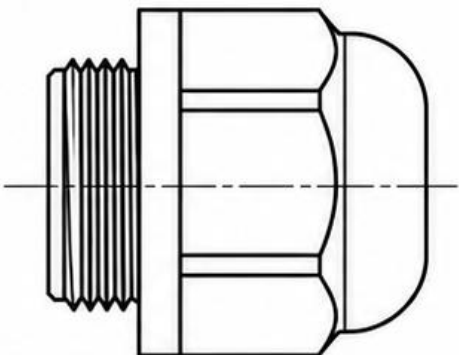

| Product Specifications                      |                                        |
|---------------------------------------------|----------------------------------------|
| Cable Outside Diameter Range                | 6.6 - 10.0 mm                          |
| Minimum Connector Pass-Through Diameter (D) | ϕ30 mm                                 |
| Optional Junction Adapter (sold separately) | CG32A-105 (sold separately)            |
| Optional Configuration                      | 2 compatible cable glands +1 CG32A-105 |

Optional in-line connector protection configuration:  
Use two compatible cable glands with one CG32A-105 junction adapter. All components are sold separately.  
Cable gland sizes may differ on each side.  
Select the cable gland based on the cable outside diameter.  
Confirm that the maximum outside diameter of the connector is smaller than D.



SCALE  
NONE

UNIT  
mm

DATE  
2025/09/10



TO-CONNE CO.,LTD

PART NUMBER  
CG32A-10B-ST-SD