


Reference Drawing

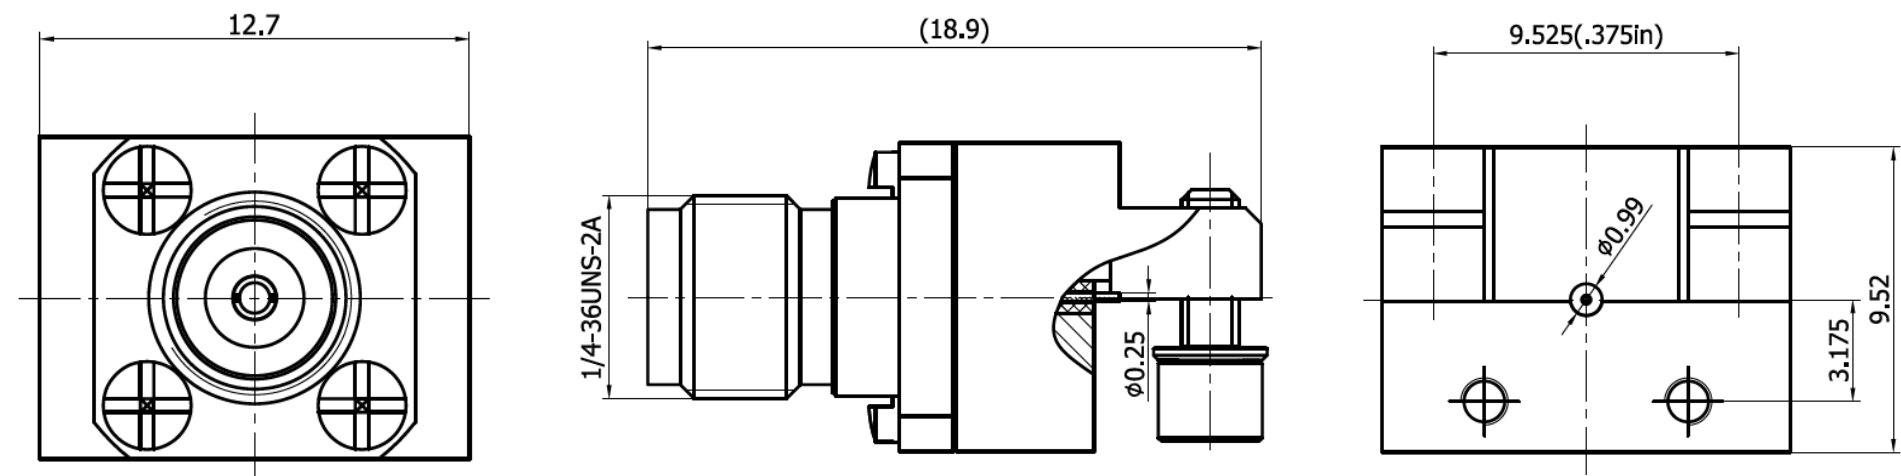

**MATERIAL:**

BODY: STAINLESS STEEL  
CONTACT: BERYLLIUM COPPER  
INSULATOR: PEI

**PERFORMANCE:**

IMPEDANCE: 50 OHMS  
FREQUENCY: DC TO 40GHz  
VSWR: ≤1.30

|                                          |                                              |
|------------------------------------------|----------------------------------------------|
| R o H S Compliant <span>Cd ≤75ppm</span> |                                              |
| REMARKS                                  | BRASS: Cd ≤75ppmPHOSPHOR<br>BRONZE: Pb <4wt% |

|                    |                |                  |
|--------------------|----------------|------------------|
| SCALE<br>NONE      |                | PART NUMBER      |
| UNIT<br>mm         |                | K292-R-EMT(SL)   |
| DATE<br>2025/06/06 | PROJECTION<br> | TO-CONNE CO.,LTD |