

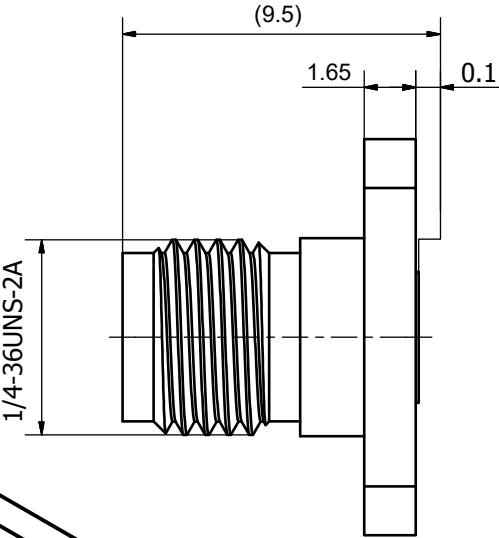


Reference Drawing

K292-RFL	ØA
K292-RFL-0.3	0.30
K292RFL-0.23	0.23
K292-RFL-0.51	0.51

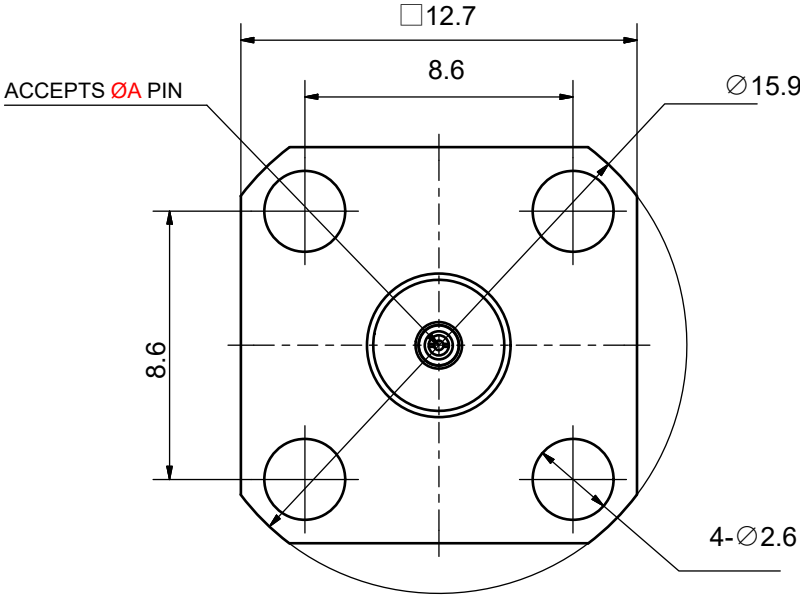

MATERIAL:

BODY: STAINLESS STEEL PER AMS-5640,
ALLOY UNS S30300

CONTACT: BERYLLIUM COPPER PER ASTM B196.
ALLOY NO. UNS C17300

INSULATOR: PEI

PERFORMANCE:

IMPEDANCE: 50 OHMS
FREQUENCY: DC TO 40 GHz
VSWR: ≤ 1.25

R o H S Compliant	
Cd ≤ 75ppm	
REMARKS	BRASS: Cd ≤ 75ppmPHOSPHOR BRONZE: Pb < 4wt%

SCALE	NONE
UNIT	mm
DATE	2025/03/05



TO-CONNE CO.,LTD

PART NUMBER
K292-RFL-ØA