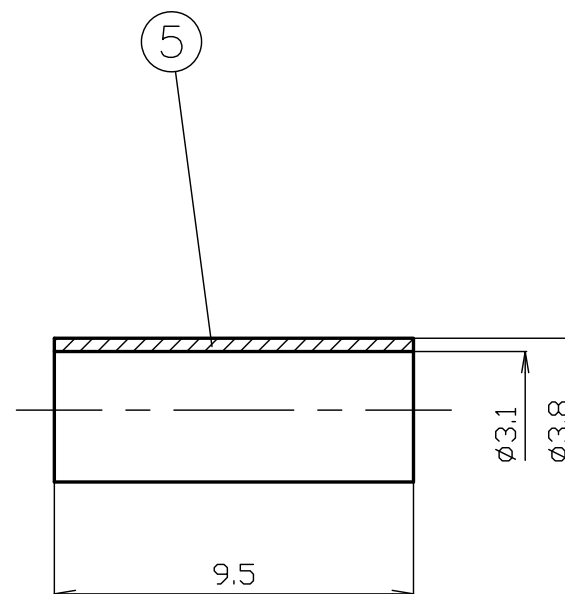
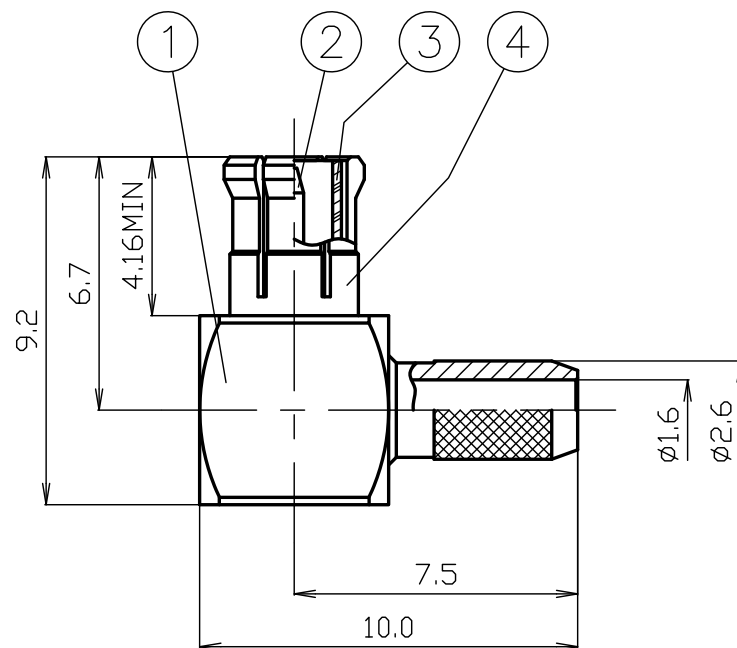


RoHS Compliant

番号	部 品 名	材 質	数 量	処 理	備 考	尺 寸	製 図	検 図	承 認	確 認	品 名
7						5 / 1					
6	カバー	黄銅	1	Au			上	檜	山	三	MCX-LP-316
5	圧着スリーブ	黄銅	1	Au			'23,12,14	'23,12,14	'23,12,14	'23,12,14	
4	外部コンタクト	ベリリウム銅	1	Au			領	澤	本	村	
3	絶縁体	テフロン	1	—		単位 mm					
2	中心コンタクト	黄銅	1	Au		目付 2015.06.29					
1	本体	黄銅	1	Au			投影法				
											図 番 Y-1014564

株式会社 トーコン
TO-CONNE CO., LTD.

PRODUCT SPECIFICATIONS

Part No. MCX-LP-316

DWG No. Y-1014564

Nominal 1 Frequency range 6 GHz
2 Impedance 50 Ω

No. 1011709

To-Conne Co., Ltd. (TYO)

Checked	Inspected	Prepared
山 15.10.19 本	檜 15.10.19 澤	栗 15.10.19 原

	Test Items	Procedures/Test method	Requirements
1	DESIGN	Design & construction	Specified on relevant product drawing (DWG No. Y-1014564) No defects or abnormalities
2		Materials	
3		Finishes	
4	ELECTRICAL	Insulation Resistance	DC 500V 5000M Ω (Min.)
5		Withstanding voltage	DC 1000V (1 minute.) No defects or abnormalities
6		Contact resistance	DC 0.2V、 1A Inner 5m Ω (Max.) Outer 2.5m Ω (Max.)
7		V. S. W. R	0~6.0GHz 1.35 (Max.)
8	MECHANICAL	Compatibility	Connecting with a standard-compliant connector No defects or abnormalities
9		Force to engage/disengage	Force to engage 63N (Max.) Force to disengage 8N~20N No defects or abnormalities
10		Center contact capivation	Axial fixing force with body (Speed 60mm/min) 10N (Min.)
11		Cable tensile strength	At axial tensile force 44.48N (Min.) No defects or abnormalities

GKQM-19-1

	Remarks	Date
1		
2		
3		