
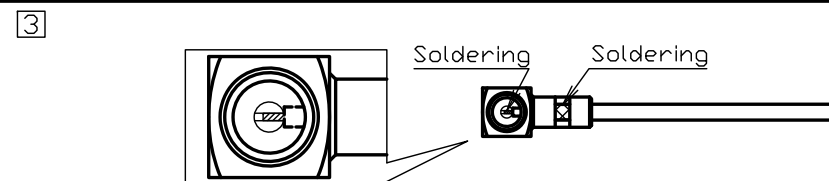


1 Preliminary soldering Outer conductor Sheath 6.4

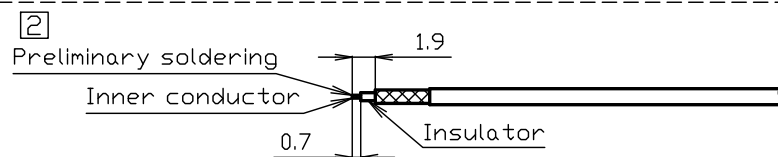

REMARKS	BRASS: Cd ≤ 75 ppm PHOSPHOR BRONZE: Pb < 4 wt%
---------	--

7					尺度 $6/1$ 単位 mm 日付 2017.12.25	製 図	検 図	承 認	確 認	品 名 MMCX-LP-0.66 図 番 Y-1015129
6	カバー	黄銅	1	Au		井	檜	山	三	
5	絶縁体B	テフロン	1	--		'23.12.13	'23.12.13	'23.12.13	'23.12.13	
4	Cリング	ベリリウム銅	1	Au		出	澤	本	村	
3	中心コンタクト	黄銅	1	Au						
2	絶縁体A	テフロン	1	--						
1	本体	黄銅	1	Au						
番号	部 品 名	材 質	数 量	処 理	備 考	投影法		 株式会社 トーゴネ TO-GONNE CO.,LTD.		

PRODUCT SPECIFICATIONS

Part No. MMCX-LP-0.66

No. 1011965

DWG No. Y-1015129

Nominal 1 Frequency range 6 GHz
2 Impedance 50Ω



	Test Items	Procedures/Test method	Requirements
1	DESIGN	Design & construction	Specified on relevant product drawing (DWG No. Y-1015129) No defects or abnormalities
2		Materials	
3		Finishes	
4	ELECTRICAL	Insulation Resistance	DC 500V 1000MΩ (Min.)
5		Withstanding voltage	DC 500V (1 minute.) No defects or abnormalities
6		Contact resistance	DC 0.2V、1A Inner 5mΩ (Max.) Outer 2.5mΩ (Max.)
7		V. S. W. R	DC~6.0GHz 1.35 (Max.)
8	MECHANICAL	Compatibility	Connecting with a standard-compliant connector No defects or abnormalities
9		Force to engage/disengage	Force to engage 6.3N (Min.) 36N (Max.) Force to disengage 6.3N (Min.) 36N (Max.) No defects or abnormalities
10		Cable tensile strength	At axial tensile force 44.48N (Min.) (1 x 32 AWG (7/0.08), 30 N (Min.) for outer diameter 1.13) No defects or abnormalities
11		Center contact cavitation	At axial tensile force 10.2N (Min.) No defects or abnormalities
12		Cable group	C0-6F-DSB-CX50、 1×32AWG (7/0.08) outer diameter 1.32, 1.13

	Remarks	Date
1		
2		
3		

Checked	Approved	Inspected	Prepared
三 22.03.28 村	山 22.03.28 本	檜 22.03.28 澤	栗 22.03.28 原

GKQM-25