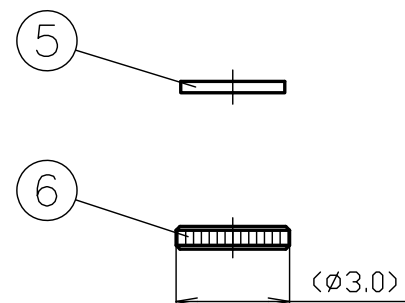
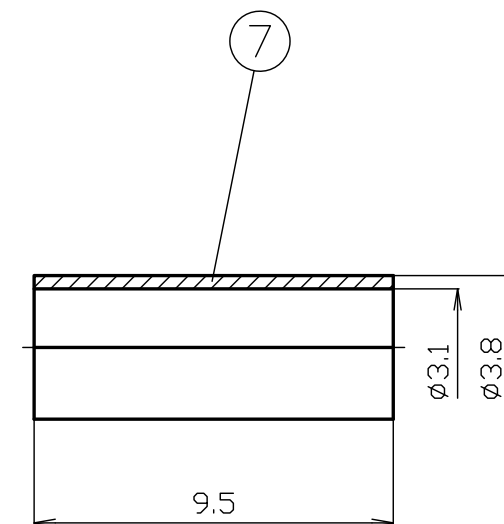
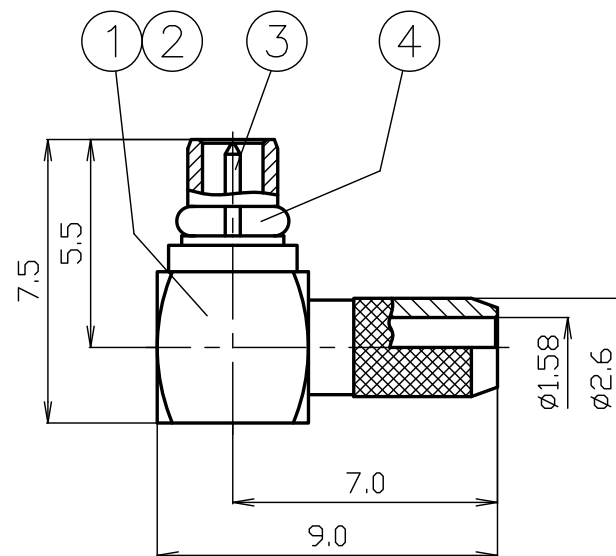


RoHS Compliant

7	圧着スリーブ	黄銅	1	Au	尺 5/1	製 図	検 図	承 認	確 認	品 名
6	カバー	黄銅	1	Au		井	檜	山	三	MMCX-LP-316
5	絶縁体B	テフロン	1	--		'23,12,23	'23,12,23	'23,12,23	'23,12,23	
4	Cリング	ベリリウム銅	1	Au		出	澤	本	村	
3	中心コンタクト	黄銅	1	Au	単 位 mm					
2	絶縁体A	テフロン	1	--	日 付 2016.03.07					
1	本体	黄銅	1	Au		投 影 法				
番号	部 品 名	材 質	数 量	処 理	備 考					図 番 Y-1014730

PRODUCT SPECIFICATIONS

Part No. MMCX-LP-316

DWG No. Y-1014730

Nominal 1 Frequency range 6 GHz
2 Impedance 50 Ω

No. 1011779

To-Conne Co., Ltd. (TYO)

Checked	Inspected	Prepared
山 16.03.08 本	檜 16.03.08 澤	栗 16.03.08 原

	Test Items	Procedures/Test method	Requirements
1	DESIGN	Design & construction	Specified on relevant product drawing (DWG No. Y-1014730) No defects or abnormalities
2		Materials	
3		Finishes	
4	ELECTRICAL	Insulation Resistance	DC 500V 1000MΩ (Min.)
5		Withstanding voltage	DC 500V (1 minute.) No defects or abnormalities
6		Contact resistance	DC 0.2V、1A Inner 5mΩ (Max.) Outer 2.5mΩ (Max.)
7		V. S. W. R	0~3.0GHz 1.25 (Max.)
8	MECHANICAL	Compatibility	Connecting with a standard-compliant connector No defects or abnormalities
9		Force to engage/disengage	Force to engage 6.3N (Min.) 36N (Max.) Force to disengage 6.3N (Min.) 36N (Max.) No defects or abnormalities
10		Cable tensile strength	At axial tensile force 44.48N (Min.) No defects or abnormalities
11		Center contact capivation	At axial tensile force 10.2N (Min.) No defects or abnormalities
12		Cable group	RG-316/U

GKQM-19-1

	Remarks	Date
1		
2		
3		