
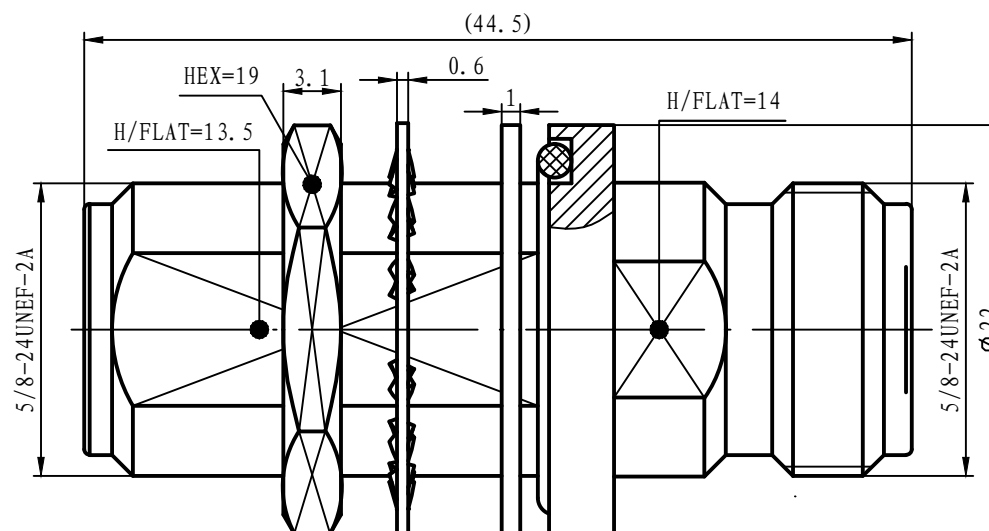




1	Electrical	
1.1	Impedance:	50Ω
1.2	Frequency range:	DC-18GHz
1.3	VSWR:	1.25 : 1 max
1.4	Insulation resistance:	5000MΩ

2	Mechanical	
2.1	Durability:	≥500 cycles

3	Environmental	
3.1	Operating temp range:	-55°C to +125°C

4	Material & Finish		
4.1	Body	Brass	Tri-material plated
4.2	Insulator	PTFE	
4.3	Contact	Phosphor copper	Gold plated
4.4	Nut	Brass	Tri-material plated
4.5	Tool washer	Drass	Tri-material plated
4.6	Washere	Brass	Tri-material plated
4.7	Gasket	Silicone rubber	

R o H S Compliant		Cd ≤75ppm
REMARKS	BRASS: Cd ≤75ppm PHOSPHOR BRONZE: Pb <4wt%	

DRAWN T.N.G	PART NUMBER N-BA-JJ-18G		
APPV'D K.I.			
UNIT mm	株式会社 トーコネ TO-CONNE CO.,LTD.		TO-CONNE CO.,LTD
DATE 2020.06.04			