


DIMENSIONAL TOLERANCE TABLE *2	
DIVISION	TOLERANCE
Less than 4.0	±0.3
4.0~16.0	±0.5
16.0~63.0	±0.7
63.0~250.0	±1.2
250.0~1000.0	±2.0

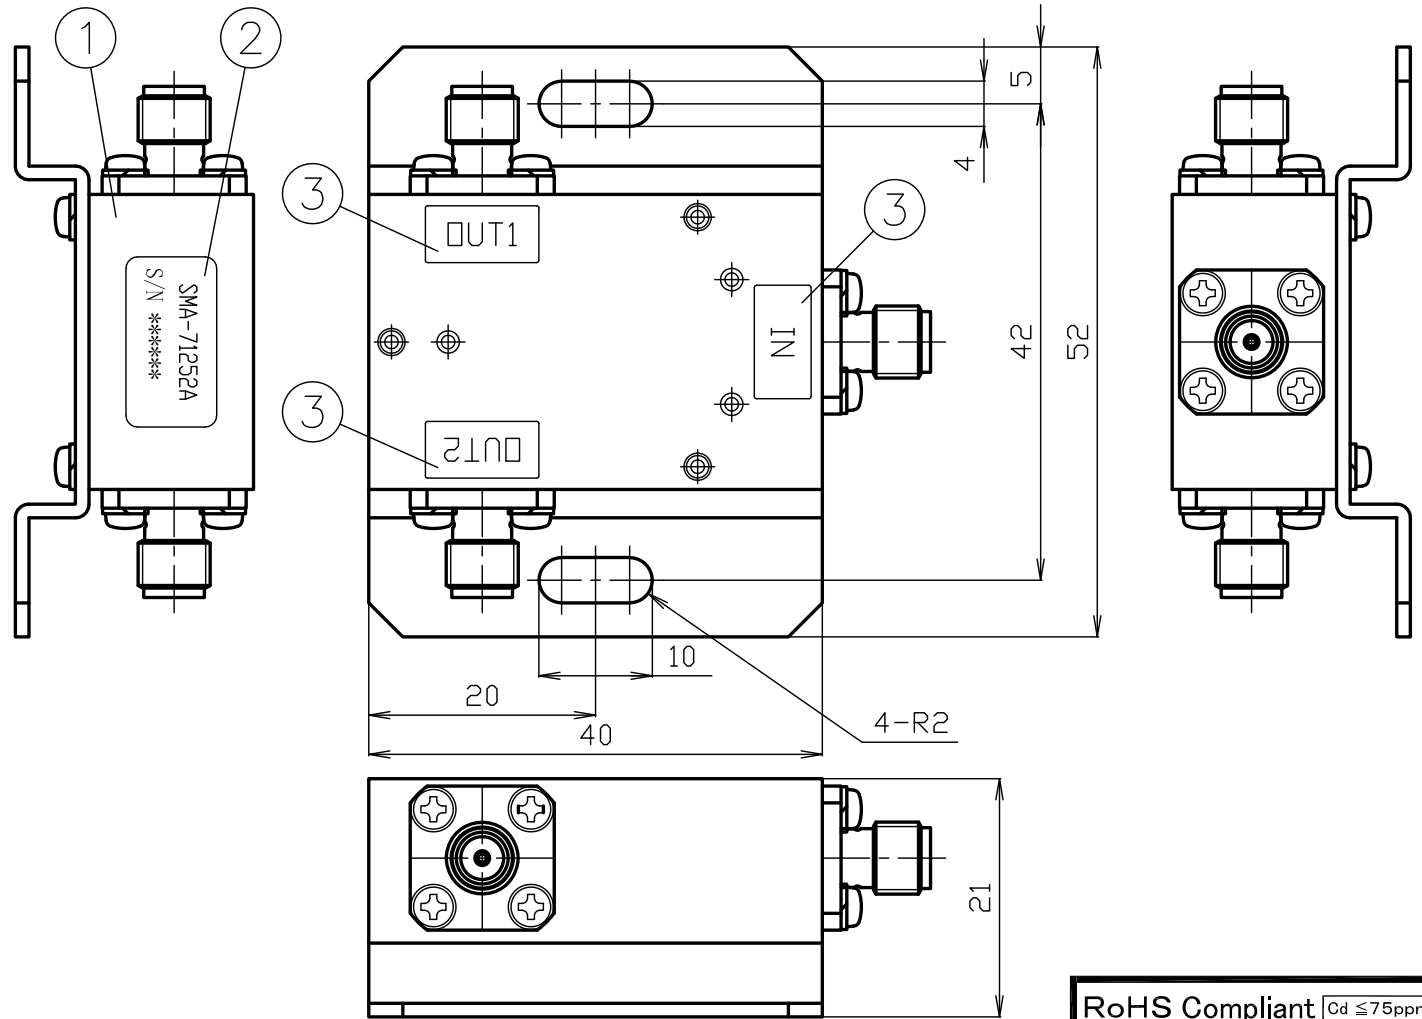

*1 : COVER PART MATERIAL : ALUMINUM / FINISH : NON-CHROMATE CONVERSION COATING
 *2 : PASSIVATE

RoHS Compliant [Cd ≤75ppm]	
REMARKS	BRASS : Cd ≤75ppm PHOSPHOR BRONZE : Pb <4wt%

NO.	DESCRIPTION	MATERIAL	Q'TY	FINISH	REMARK	SCALE	DRAWN	INSPECTED	APPROVED	CHECKED	PART NUMBER
6						3/2	上	山	檜	三	SMA-71252A
5						TOLERANCE	'26,05,14	'26,05,14	'26,05,14	'26,05,14	
4						*2	領	本	澤	村	
3	INPUT/OUTPUT LABEL	-----	3	--		UNIT					
2	LABEL	-----	1	--		mm					
1	SMA-J TYPE COAXIAL 2 DISTRIBUTOR	*1	1	--	BODY/*2. CENTER PIN/Au(SMA CONNECTOR)	DATE	PROJECTION				
						2026.05.14					DRAWING NO. V-1196951



■Part number : SMA-71252A

■Drawing number : V-1196951

■Nominal

Standard : IEC 61169-15

Power handing : 250mW

Rated frequency : 5500MHz~7125MHz

Impedance : 50Ω (Unbalance)

Operating temperature range : -10°C~+45°C

Operating humidity range : 90%(Max.) ※No condensation

■Structural shape : Conformity with the drawings.

■Electrical

Test Items	Test Method/Value	Remarks
Insertion loss	5500MHz~7125MHz : 3.5dB(Max.)	Including distribution loss
VSWR	5500MHz~7125MHz : 1.3(Max.)	
Isolation	5500MHz~7125MHz : 18dB(Min.)	
Amplitude characteristics	5500MHz~7125MHz : 0.5dBp-p(Max.)	

■Mechanical

Test Items	Test Method/Value	Remarks
Compatibility	No defects or abnormalities	Connecting with a standard compliant connector

■Revisions

No.	Date	Contents
1		
2		

Date	Name
2026/5/15	上領(Prepared)
2026/5/15	山本(Inspected)
2026/5/15	檜澤(Approved)
2026/5/15	三村(Checked)