


Reference Drawing

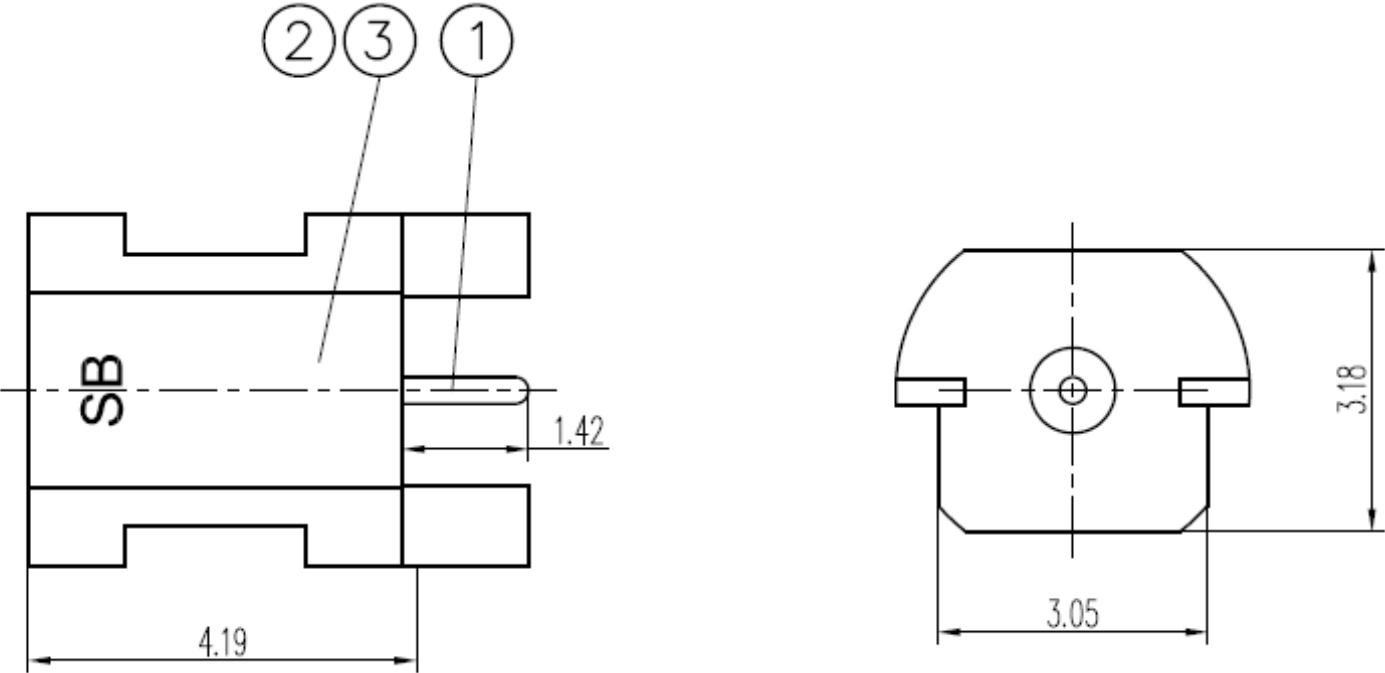

PERFORMANCE:
IMPEDANCE: 50 OHMS
FREQUENCY: 65GHz
VSWR: ≤1.30

- *1: PASSIVATE
- *2: STAINLESS STEEL
- *3: BERYLLIUM COPPER

R o H S Compliant	
Cd ≤75ppm	
REMARKS	BRASS: Cd ≤75ppmPHOSPHOR BRONZE: Pb <4wt%

3	BODY	*1	1	AU
2	INSULATOR	PTFE	2	--
1	CENTER PIN	*3	1	AU
NO.	DESCRIPTION	MATERIAL	Q'TY	FINISH

SCALE
NONE

UNIT
mm

DATE
2025/08/26



TO-CONNE CO.,LTD

PART NUMBER

SMPM-PR-EMT(SB)