


Reference Drawing

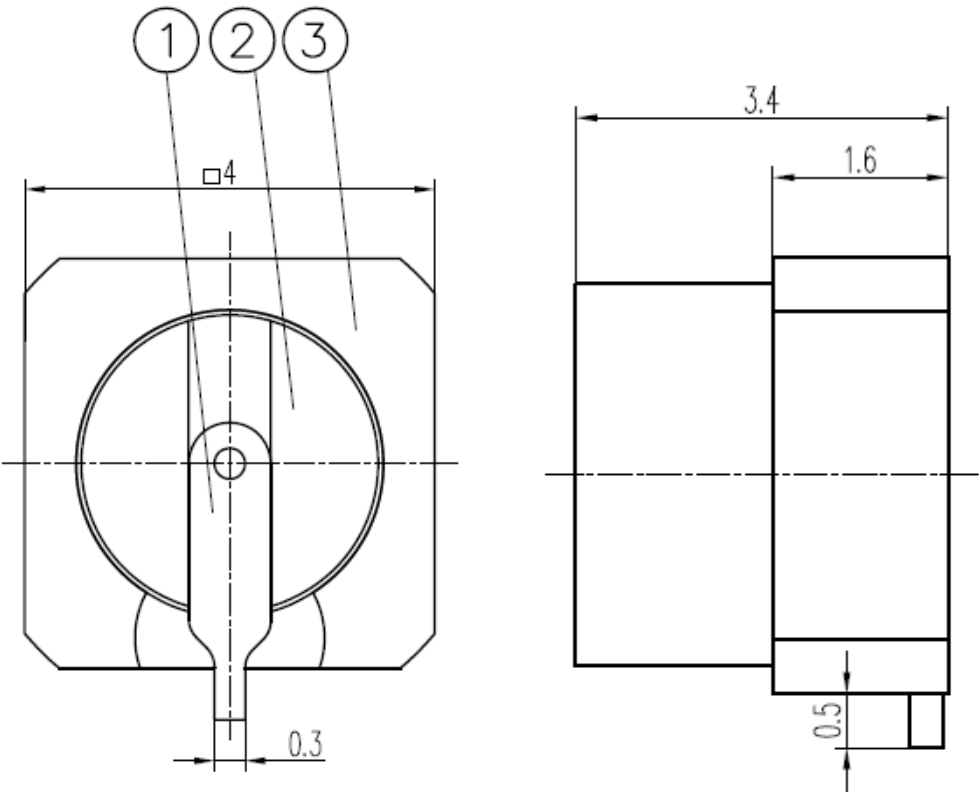


PERFORMANCE:
IMPEDANCE: 50 OHMS
FREQUENCY: 65GHz
VSWR :

- *1: PASSIVATE
- *2: STAINLESS STEEL
- *3: BERYLLIUM COPPER
- *4: BRASS

R o H S Compliant	
Cd ≤75ppm	
REMARKS	BRASS: Cd ≤75ppmPHOSPHOR BRONZE: Pb <4wt%

3	BODY	*4	1	Au
2	INSULATOR	PTFE	1	--
1	CENTER PIN	*4	1	AU
NO.	DESCRIPTION	MATERIAL	Q'TY	FINISH



SCALE NONE			PART NUMBER
			SMPM-PR-SMT(SB)
UNIT mm	 TO-CONNE CO.,LTD		
DATE 2025/08/26			